

Product Data Sheet

Fellert Even Better Acoustical System Secern

Product Description

Even Better is a hand-crafted seamless sound absorption system. The Even Better Acoustical system consists primarily of acoustical boards made from fiberglass and acoustical plaster made from perlite and cotton covered with acoustical coating.

Properties

Acoustical Plaster is comprised of 30% recycled material

Acoustical Board is comprised of 60% recycled material


Easy to maintain

Powder products unaffected by frost

Pot Life of 12-18 hours

Excellent water vapor permeability

Thermal conductivity ASTM C-177 @ 75 F on 6.0 PCF 0.22

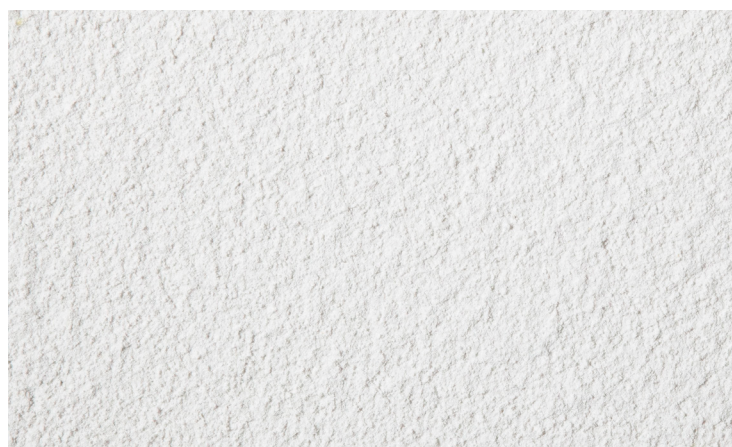

Suitable Substrates

16 mm (5/8") Regular gypsum wallboard

Metal ceiling grid

(400 mm or 16" o.c. as constructed for 16 mm (5/8") commercial drywall installations)

Concrete

Previously painted substrates

Installation

The Even Better Acoustical Board is typically attached to any of the suitable substrates with either the Even Better Board Adhesive or mechanically attached with the Even Better Spring Washer.

The Even Better Acoustical Plaster is mixed with water and applied with a spray machine and troweled to an approximate thickness of 3 mm (1/8"). The Even Better Acoustical Coating is applied with a spray machine in 1-2 light passes. Refer to the Even Better Installation Guide for application instructions and coverage rates.



Styjl
Kyrkängsgatan 6
SE 503 38 Borås
Sweden
Phone +46 (0)33 430 22 00
info@styjl.com

**Crafted
Acoustics**

Product Data Sheet

Fellert Even Better Acoustical System Secern

Test Data

Sound Absorption as per ASTM C423

Mount Type A:

- NRC 0.85 with 25 mm (1") Even Better Acoustical System to 16 mm (5/8") GWB
- NRC 0.95 with 39 mm (1.5") Even Better Acoustical System to 16 mm (5/8") GWB

Sound Absorption as per ASTM E795

Mount Type E:

- NRC 0.80 with 25 mm (1") Even Better Acoustical System with air gap behind
- NRC 0.90 with 39 mm (1.5") Even Better Acoustical System with air gap behind

Light Reflectance as per ASTM E147-98a: 0.93

Fire Testing as per ASTM E84-04: Class A

Fire Testing as per ISO EN 13501 2007: Bs1d0

VOC as per ASTM D3960: $\leq 7\text{g/L}$

Mold as per ASTM D3273/ASTM D3274: Meets testing specifications

Sound Absorption as per ISO 354 and ISO 11654

Type A mounting:

- $\alpha_w = 0.80$ (Absorption class B) with 25 mm (1") Even Better Acoustical System.
- $\alpha_w = 0.95$ (Absorption class A) with 39 mm (1.5") Even Better Acoustical System

Sound Absorption as per ISO 354 and ISO 11654

Type E-200 mounting:

- $\alpha_w = 0.90$ (Absorption class B) with 25 mm (1") Even Better Acoustical System.
- $\alpha_w = 0.95$ (Absorption class A) with 39 mm (1.5") Even Better Acoustical System

Storage

Store all materials in an enclosed dry environment and not in direct sunlight. Protect Acoustical Coating and primer from frost.

Health & Safety considerations

- When mixing any of the dry powder products, wear a respirator.
- When handling and installing any fiberglass boards, follow OSHA recommendations.
- When using any of the Even Better products wear protective clothing and avoid contact with your skin whenever possible.
- Wear eye protection at all times. If eye contact occurs, irrigate eye with clean water and seek immediate medical attention.
- If any of the materials are swallowed, seek immediate medical attention.



Styjl
Kyrkängsgatan 6
SE 503 38 Borås
Sweden
Phone +46 (0)33 430 22 00
info@styjl.com

Crafted
Acoustics