

Product Data Sheet

Fellert Even Better Spring Washer

Product Description

The Fellert Spring Washer is designed to mount the absorbent boards directly to the suspension grid, with minimum impact of sound absorption properties and air flow properties.

Installation


The spring washers are anchored using Fellert Zincotec ZN screws of appropriate length. The spring washer screw is tightened until the washer reaches the absorbent board surface. Then cut a 5-7 mm deep cut along the entire washer and tighten the screw until the washer is no longer visible. Coverage: approx. 8 washers per 1 m² (10 ft.).

Properties

Loop bent, Stainless Steel R35019 AISI 304
Thickness: 2,5 mm - 0,250 mm
Packaging: boxes of 200 pcs.

Storage

Store in enclosed dry environment.
Keep the spring washers in their boxes until they are to be installed.

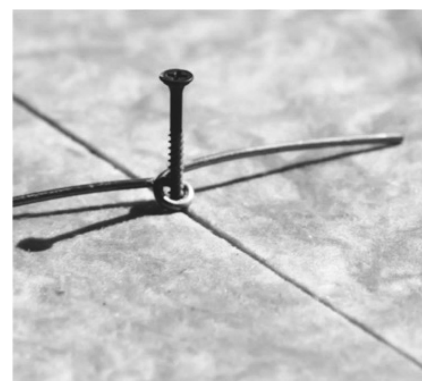

Styl
Kyrkängsgatan 6
SE 503 38 Borås
Sweden
Phone +46 (0)33 430 22 00
info@styl.com

Crafted
Acoustics